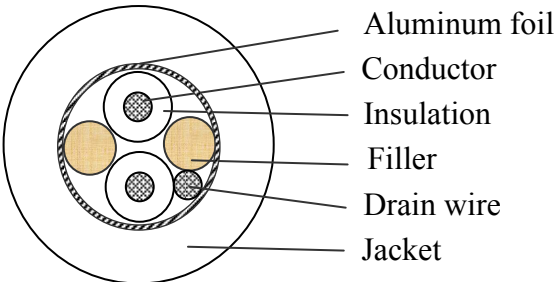


WCH CABLE INDUSTRIAL CO., LTD.

SPECIFICATION

STYLE:	UL20549	PART NO.	DATE	REV
Specification:	22AWG*2C+D	WCH17032308	2017-03-23	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification	(awg)	22	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS17/0.16±0.007	
Insulation	Average Thickness	(mm)	0.25	
	Minimum Thickness	(mm)	0.21	
	Over Diameter	(mm)	1.30±0.10	
	Material		LSZH (RoHS+Reach)	
	Colour		Black, Red	
Assembly	Filler		Cotton Filler	
	Drain	(mm)	TS11/0.16±0.007	
	Aluminum Foil		One Side Aluminum	
Jacket	Average Thickness	(mm)	0.76	
	Minimum Thickness	(mm)	0.61	
	Over Diameter	(mm)	4.20±0.20	
	Material		TPU (RoHS+Reach)	
	Colour		Black	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	59.4	
	Insulation Resistance	(MΩ/KM 20°C)	100	
Remark	Moisture, UV resistant, Rodent repellent			

Prepared by: WCH Cable Industrial Co., Ltd.
Any inquiry, please write to company email: sales@wchcable.com