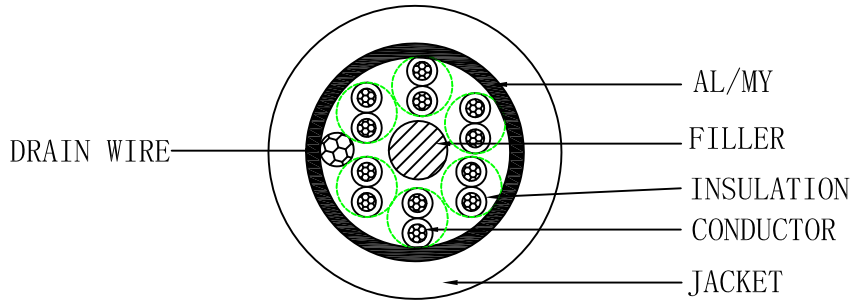


WCH CABLE INDUSTRIAL CO., LTD.

SPECIFICATION

STYLE:	UL20549	PART NO.	DATE	REV
Specification:	24AWGx6PR (F+D+AL)	WCH17072501	2017/07/25	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification	(AWG)	24	
	Material	Tinned Stranded Copper		
	Configuration	(mm)	TS19/0.127±0.007	
Insulation	Average Thickness	(mm)	0.36	
	Minimum Thickness	(mm)	0.29	
	Over Diameter	(mm)	1.40±0.15	
	Material	PVC (RoHS)		
	Colour	TBD		
Assembly	FILLER	20000D*1PCS PP Rope		
	Drain Wire	(mm)	TS19/0.127±0.007	
	Screened Shield	One Side Aluminum (AL Facing Inside)		
Jacket	Average Thickness	(mm)	0.75	
	Minimum Thickness	(mm)	0.60	
	Over Diameter	(mm)	9.10±0.30	
	Material	TPU (RoHS), VW-1		
	Colour	Black		
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	94.2	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Marking	Per standard, or customize per request.			

Prepared by: WCH Cable Industrial Co., Ltd.

Any inquiry, please write to company email: sales@wchcable.com