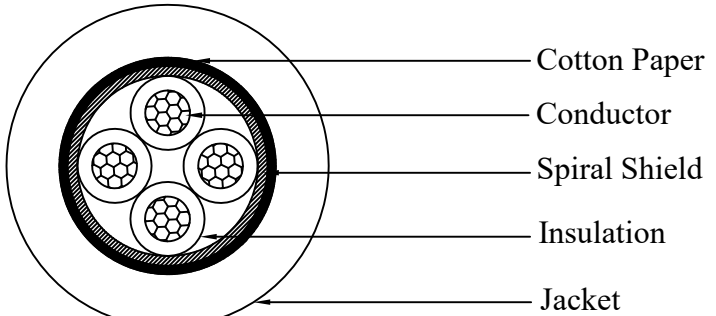


WCH CABLE INDUSTRIAL CO., LTD.

SPECIFICATION

STYLE:	UL20549	PART NO.	DATE	REV
COMPONENT:	26AWGX4C+S+PA	WCH230908A8	2023-09-08	1.0
Structure Diagram				

Technical Parameters

Conductor	Specification	26AWG
	Material	Tinned Stranded Copper
	Configuration (mm)	TS7/0.16±0.007
Insulation	Average Thickness (mm)	0.38
	Minimum Thickness (mm)	0.31
	Over Diameter (mm)	1.30±0.10
	Material	PVC (RoHS)
	Colour	Grey, Yellow, Purple, Red
Assembly	Filler	/
	Spiral Shield (mm)	TS82/0.12±0.007 (Coverage≥95%)
	Cotton Paper (mm)	0.025
Jacket	Average Thickness (mm)	0.79
	Minimum Thickness (mm)	0.63
	Over Diameter (mm)	5.00±0.20
	Material	Polyurethane TPU
	Colour	Black
Electrical Capability	Rated Temperature (°C)	80
	Rated Voltage (V)	300
	Conductor Resistance (Ω/KM 20°C)	150
	Insulation Resistance (MΩ/KM 20°C)	10
Marking	Per standard.	